

simply radiators

Cast Iron Radiators – Data Sheet

Model	No. of Columns	Section Height (mm)	Section Depth (mm)	Section Width (mm)	Section Weight (Kg)	Water Content (Lt)	Tapping Centres (mm)	Output 56°C Δt (Watts)
Victorian								
V2/88	2	880	70	60	4.7	0.52	800	97
V4/58	4	580	146	60	6.1	0.71	500	108
V4/68	4	680	146	60	6.7	0.78	600	127
V4/88	4	880	146	60	8.8	0.94	800	163
V6/43	6	430	225	60	6.9	0.78	350	118
V6/58	6	580	225	60	9.1	1.00	500	158
V6/68	6	680	225	60	10.4	1.16	600	179
V6/88	6	880	225	60	13.4	1.43	800	233
V9/30	9	300	340	60	7.6	1.03	220	127
Viceroy								
K070/43	2	430	70	60	2.7	0.43	350	52
K070/58	2	580	70	60	3.4	0.60	500	65
K070/98	2	980	70	60	5.5	0.72	900	106
K110/43	3	430	110	60	3.7	0.65	350	67
K110/58	3	580	110	60	5.8	0.76	500	87
K160/43	4	430	160	60	4.5	0.80	350	89
K160/58	4	580	160	60	5.8	1.01	500	120
K160/68	4	680	160	60	7.0	1.15	600	140
K160/98	4	980	160	60	9.7	1.80	900	195
K220/43	5	430	220	60	6.5	1.90	350	116
K220/58	5	580	220	60	8.9	1.24	500	154
K220/98	5	980	220	60	14.0	1.87	900	248
K250/28	6	280	250	60	5.4	0.82	200	87
Regent								
VR750	2	760	203	76	11.0	2.60	600	155
VR950	2	954	203	76	13.5	3.30	795	182
Viscount								
BR750	2	750	136	70	7.5	1.80	600	136
Colonial								
VL46/4	4	460	120	60	-	-	-	83
VL66/4	4	660	143	60	-	-	-	116
VL76/4	4	760	143	60	-	-	-	145
VL81/4	4	813	160	58	-	-	-	152
Excelsior								
EX760	3	760	225	80	11.3	2.3	582	182
EX950	3	950	250	80	14.4	2.8	782	231

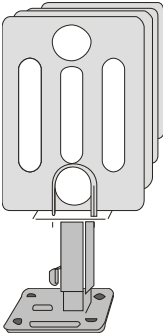
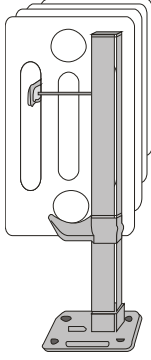
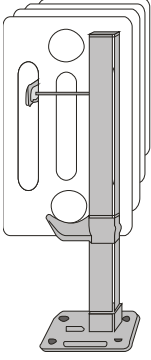
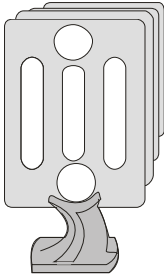
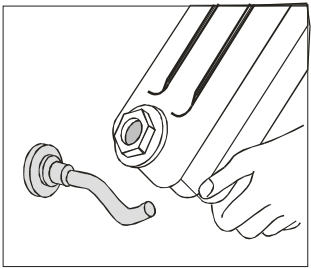




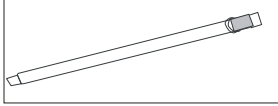



Cast Iron Radiators – Data Sheet

Model	No. of Columns	Section Height (mm)	Section Depth (mm)	Section Width (mm)	Section Weight (Kg)	Water Content (Lt)	Tapping Centres (mm)	Output 56°C Δt (Watts)
Windsor								
WD67/4	4	670	144	60	5.3	0.85	500	120
WD77/4	4	770	144	60	5.9	0.97	600	138
WD97/4	4	970	144	60	7.5	1.1	800	179
WD49/6	6	490	221	60	5.8	0.85	350	123
WD67/6	6	670	221	60	7.7	1.2	500	172
Edwardian								
ED36/4	4	357	175	60	2.4	0.35	200	50
ED48/4	4	475	175	60	3.5	0.51	320	75
ED66/4	4	660	175	60	5.3	0.85	500	106
ED76/4	4	760	175	60	5.9	0.97	600	123
ED96/4	4	960	175	60	7.5	1.1	800	159
ED49/6	6	485	221	60	5.8	0.85	350	109
ED66/6	6	660	221	60	7.74	1.2	500	152

Cast Iron Radiators:

- Cast iron radiators are supplied in primer finish.
- Delivered pre-assembled up to 10 sections.
- A joining key is required for on-site assembly of radiators in excess of ten sections.
- Floor supports and/or wall brackets are required with all radiators.
- Cast iron radiators are designed for closed/indirect heating systems.
- Simply Radiators reserve the right to alter design, specifications and prices without prior notice.

Cast Iron Radiators – Data Sheet Accessories and Spares

				
VN36 U-Bolt Floor Support	VN37 Adjustable Pillar Floor Support	VN38 Adjustable Pillar Floor Support	VN35 Floor Support	VN30C, VN31M, VN33L Wall Brackets
Height adjustable from 120mm to 200mm. Must be used with VN34 Retaining Stays.	Height adjustment up to 660mm. For models: V4/58, V6/43, V6/58, K070/43, K070/58, K110/43, K110/58, K220/43 & K220/58.	Height adjustment up to 1060mm. For models: V4/68, V6/68, K160/68.	Height: 50mm.	VN30C – For 2 column radiators. VN31M – For 3-4 column radiators. VN33L – For 5-6 column radiators.
				
VN01 Air Vent	VN02 Joining Nipple 1 ¼" BSP	VN04 End Plug 1 ¼" BSP	VN06 Tapping Bush ⅛", ½", ¾", 1"	VN03 Joining Key
				
VN10 Tapping gasket	VN11 Joining gasket	VN34 Retaining Stay		
To fit 1 ¼" BSP.	To fit 1 ¼" BSP.	Minimum distance from wall = 20mm, Maximum distance from wall = 100mm. Minimum of 2 stays with wall brackets and floor support VN35 and VN36.		

Simply Radiators

Sandycroft House • 20 Station Road • Woburn Sands • Bucks MK17 8RW
Tel: 0870 991 3648 • Fax: 0870 432 5213 • Email: sales@simplyradiators.co.uk • Web: www.simplyradiators.co.uk