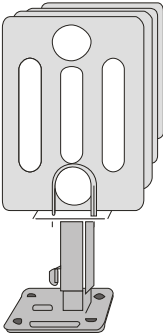
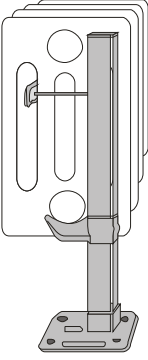
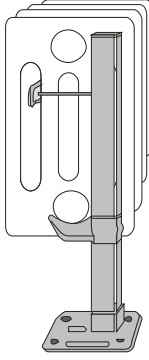
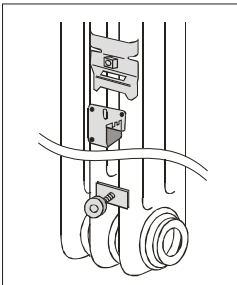
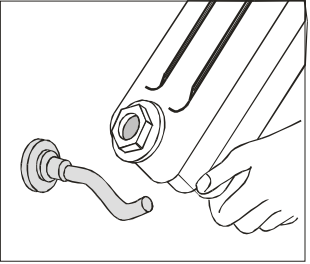




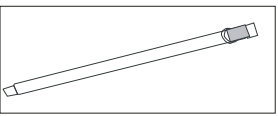





# simply radiators

## Column Radiators – Data Sheet

Model	No. of Columns	Section Height (mm)	Section Depth (mm)	Section Width (mm)	Output 60°C Δt (Watts)	Output 50°C Δt (Watts)
<b>Tubarad</b>						
TB300/2	2	300	63	46	29	22
TB300/3	3	300	101	46	41	31
TB300/4	4	300	139	46	53	40
TB300/5	5	300	177	46	64	48
TB300/6	6	300	215	46	76	57
TB400/2	2	400	63	46	38	28
TB400/3	3	400	101	46	55	41
TB400/4	4	400	139	46	70	52
TB400/5	5	400	177	46	85	64
TB400/6	6	400	215	46	100	75
TB500/2	2	500	63	46	49	37
TB500/3	3	500	101	46	69	51
TB500/4	4	500	139	46	87	65
TB500/5	5	500	177	46	107	80
TB500/6	6	500	215	46	126	94
TB600/2	2	600	63	46	59	44
TB600/3	3	600	101	46	81	60
TB600/4	4	600	139	46	104	77
TB600/5	5	600	177	46	127	95
TB600/6	6	600	215	46	151	113
TB750/2	2	750	63	46	74	55
TB750/3	3	750	101	46	101	75
TB750/4	4	750	139	46	128	95
TB750/5	5	750	177	46	157	117
TB750/6	6	750	215	46	184	137
TB900/2	2	900	63	46	90	67
TB900/3	3	900	101	46	119	89
TB900/4	4	900	139	46	150	112
TB900/5	5	900	177	46	185	138
TB900/6	6	900	215	46	219	163
TB1000/2	2	1000	63	46	98	73
TB1000/3	3	1000	101	46	131	98
TB1000/4	4	1000	139	46	166	124
TB1000/5	5	1000	177	46	204	151
TB1000/6	6	1000	215	46	241	180
TB1500/2	2	1500	63	46	142	106
TB1500/3	3	1500	101	46	192	143
TB1500/4	4	1500	139	46	242	180
TB1500/5	5	1500	177	46	288	215
TB1500/6	6	1500	215	46	335	250
TB2000/2	2	2000	63	46	188	140
TB2000/3	3	2000	101	46	254	189
TB2000/4	4	2000	139	46	319	237
TB2000/5	5	2000	177	46	378	282
TB2000/6	6	2000	215	46	442	330
TB2500/2	2	2500	63	46	233	174
TB2500/3	3	2500	101	46	316	236
TB2500/4	4	2500	139	46	395	295
TB2500/5	5	2500	177	46	465	347
TB2500/6	6	2500	215	46	541	403

<b>Model</b>	<b>No. of Columns</b>	<b>Section Height (mm)</b>	<b>Section Depth (mm)</b>	<b>Section Width (mm)</b>	<b>Output 60°C Δt (Watts)</b>	<b>Output 50°C Δt (Watts)</b>
<b>Easirad</b>						
ER300/2	2	292	66	45	30	24
ER300/3	3	292	107	45	42	33
ER300/4	4	292	148	45	55	44
ER300/5	5	292	189	45	68	54
ER300/6	6	292	230	45	80	63
ER400/2	2	392	66	45	39	31
ER400/3	3	392	107	45	54	43
ER400/4	4	392	148	45	71	56
ER400/5	5	392	189	45	88	70
ER400/6	6	392	230	45	105	83
ER500/2	2	492	66	45	47	37
ER500/3	3	492	107	45	66	52
ER500/4	4	492	148	45	86	68
ER500/5	5	492	189	45	107	85
ER500/6	6	492	230	45	129	102
ER600/2	2	592	66	45	55	44
ER600/3	3	592	107	45	78	62
ER600/4	4	592	148	45	102	80
ER600/5	5	592	189	45	126	99
ER600/6	6	592	230	45	152	120
ER750/2	2	742	66	45	68	54
ER750/3	3	742	107	45	96	75
ER750/4	4	742	148	45	125	99
ER750/5	5	742	189	45	153	121
ER750/6	6	742	230	45	186	147
ER900/2	2	892	66	45	80	64
ER900/3	3	892	107	45	113	89
ER900/4	4	892	148	45	148	117
ER900/5	5	892	189	45	179	141
ER900/6	6	892	230	45	218	172
ER1000/2	2	992	66	45	89	70
ER1000/3	3	992	107	45	124	98
ER1000/4	4	992	148	45	164	129
ER1000/5	5	992	189	45	196	155
ER1000/6	6	992	230	45	240	190
ER1500/2	2	1492	66	45	131	104
ER1500/3	3	1492	107	45	180	142
ER1500/4	4	1492	148	45	233	184
ER1500/5	5	1492	189	45	280	221
ER1500/6	6	1492	230	45	341	269
ER1800/2	2	1792	66	45	158	124
ER1800/3	3	1792	107	45	212	168
ER1800/4	4	1792	148	45	275	217
ER1800/5	5	1792	189	45	329	259
ER1800/6	6	1792	230	45	396	312
ER2000/2	2	1992	66	45	176	139
ER2000/3	3	1992	107	45	234	185
ER2000/4	4	1992	148	45	301	238
ER2000/5	5	1992	189	45	361	285
ER2000/6	6	1992	230	45	431	341

				
VN36 U-Bolt Floor Support	VN37 Adjustable Pillar Floor Support	VN38 Adjustable Pillar Floor Support	VN28 Wall Bracket Set (3 Piece)	VN30C, VN31M, VN33L Wall Brackets
Height adjustable from 120mm to 200mm. Must be used with VN34 Retaining Stays.	Height adjustment up to 660mm.	Height adjustment up to 1060mm.	2 required for up to 10 sections. Thereafter (2 & 3 column) 1 for every additional 10 sections. (4,5 & 6 column) 1 for every additional 5 sections.	VN30C – For 2 & 3 column radiators. VN31M – For 4 column radiators. VN33L – For 5 & 6 column radiators.
				
VN14 Air Vent	VN02 Joining Nipple 1 ¼" BSP	VN14 End Plug 1 ¼"	VN15 Tapping Bush 1/8", 1/2", 3/4", 1"	VN03 Joining Key
				
VN12 Silicon Tapping gasket	VN13 Silicon Joining gasket	VN34 Retaining Stay		
To fit 1 ¼" BSP.	To fit 1 ¼" BSP.	Minimum distance from wall = 20mm, Maximum distance from wall = 100mm. Minimum of 2 stays with wall brackets and floor support VN36.		

<b>Model</b>	<b>No. of Sections</b>	<b>Height (mm)</b>	<b>Width (mm)</b>	<b>Depth (mm)</b>	<b>Output 60°C Δt (Watts)</b>	<b>Output 50°C Δt (Watts)</b>
<b>Radline</b>						
TV50/08	8	500	289	30	256	192
TV50/10	10	500	361	30	320	240
TV50/12	12	500	433	30	384	288
TV50/14	14	500	505	30	448	336
TV50/16	16	500	577	30	512	384
TV90/08	8	900	289	30	456	344
TV90/10	10	900	361	30	570	430
TV90/12	12	900	433	30	684	516
TV90/14	14	900	505	30	798	602
TV90/16	16	900	577	30	912	688
TV150/08	8	1500	289	30	728	544
TV150/10	10	1500	361	30	910	680
TV150/12	12	1500	433	30	1092	816
TV150/14	14	1500	505	30	1274	952
TV150/16	16	1500	577	30	1456	1088
TV180/08	8	1800	289	30	872	656
TV180/10	10	1800	361	30	1090	820
TV180/12	12	1800	433	30	1308	984
TV180/14	14	1800	505	30	1526	1148
TV180/16	16	1800	577	30	1744	1312
TV200/08	8	2000	289	30	936	704
TV200/10	10	2000	361	30	1170	880
TV200/12	12	2000	433	30	1404	1056
TV200/14	14	2000	505	30	1638	1232
TV200/16	16	2000	577	30	1872	1408
<b>Décor</b>						
DEC32	-	450	736	139	1145	861
DEC32	-	450	828	139	1287	968
DEC32	-	450	920	139	1431	1076
DEC32	-	450	1196	139	1861	1399
DEC32	-	450	1380	139	2147	1614
DEC32	-	450	1564	139	2433	1829
DEC32	-	500	828	139	1415	1064
DEC32	-	550	828	139	1539	1157
DEC32	-	550	1012	139	1882	1415
DEC32	-	550	1196	139	2224	1672
DEC32	-	550	1380	139	2566	1929
DEC32	-	550	2024	139	3763	2929
DEC21	-	1800	460	85	1769	1330
DEC21	-	2000	460	85	1955	1470

<b>Model</b>	<b>No. of Sections</b>	<b>Height (mm)</b>	<b>Width (mm)</b>	<b>Depth (mm)</b>	<b>Output 60°C Δt (Watts)</b>	<b>Output 50°C Δt (Watts)</b>
<b>Tubarad Bench</b>						
TBB38/130	-	388	1300	250	-	887
TBB43/130	-	434	1300	250	-	1108
TBB48/130	-	480	1300	250	-	1330
TBB38/160	-	388	1600	250	-	1061
TBB43/160	-	434	1600	250	-	1326
TBB48/160	-	480	1600	250	-	1686
TBB38/190	-	388	1900	250	-	1264
TBB43/190	-	434	1900	250	-	1580
TBB48/190	-	480	1900	250	-	1895
TBB38/210	-	388	2100	250	-	1400
TBB43/210	-	434	2100	250	-	1750
TBB48/210	-	480	2100	250	-	2100
TBB38/260	-	388	2600	250	-	1713
TBB43/260	-	434	2600	250	-	2142
TBB48/260	-	480	2600	250	-	2570

## Column Radiators:

- All column radiators are supplied in white as standard. Most RAL colours are available as an option.
- The Tubarad model is available in heights from 220mm to 3000mm.
- The Easirad model is available in heights from 292mm to 2492mm.
- Where required tapping bushes, plugs and air vents are supplied as standard and are free of charge.
- Radline radiators are available in heights from 300mm to 2300mm and widths from 4 to 35 sections.
- Radline models can be configured horizontally or vertically to suit your personal needs.
- A comprehensive range of brackets and floor supports is available to give total flexibility.
- These column radiators are designed for closed/indirect heating systems.
- All radiators are pressure tested to 13 bar with a maximum working pressure of 10 bar and are guaranteed against manufacturing defects for 5 years.
- Simply Radiators reserve the right to alter design, specifications and prices without prior notice.

simply radiators

7 Centurion Court • Brick Close • Milton Keynes • Bucks MK11 3JB  
 Tel: 01908 566906 • Fax: 01908 562967 • Email: [sales@simplyradiators.co.uk](mailto:sales@simplyradiators.co.uk) • Web: [www.simplyradiators.co.uk](http://www.simplyradiators.co.uk)