

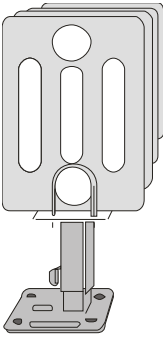
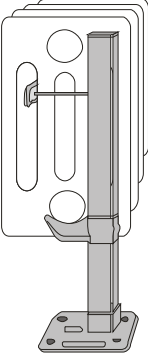
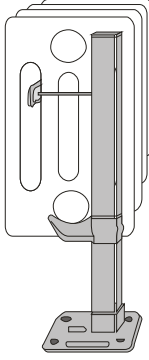
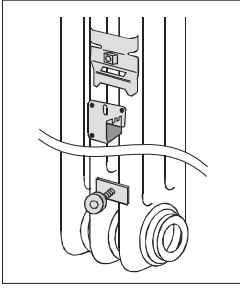
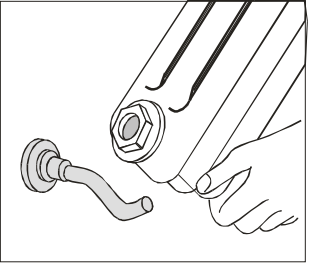




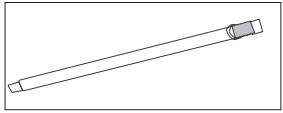



# simply radiators

## Tubular Steel Radiators – Data Sheet

Model	No. of Columns	Section Height (mm)	Section Depth (mm)	Section Width (mm)	Output 60°C Δt (Watts)	Output 50°C Δt (Watts)
<b>Tubarad</b>						
TB300/2	2	300	63	46	29	22
TB300/3	3	300	101	46	41	31
TB300/4	4	300	139	46	53	40
TB300/5	5	300	177	46	64	48
TB300/6	6	300	215	46	76	57
TB400/2	2	400	63	46	38	28
TB400/3	3	400	101	46	55	41
TB400/4	4	400	139	46	70	52
TB400/5	5	400	177	46	85	64
TB400/6	6	400	215	46	100	75
TB500/2	2	500	63	46	49	37
TB500/3	3	500	101	46	69	51
TB500/4	4	500	139	46	87	65
TB500/5	5	500	177	46	107	80
TB500/6	6	500	215	46	126	94
TB600/2	2	600	63	46	59	44
TB600/3	3	600	101	46	81	60
TB600/4	4	600	139	46	104	77
TB600/5	5	600	177	46	127	95
TB600/6	6	600	215	46	151	113
TB750/2	2	750	63	46	74	55
TB750/3	3	750	101	46	101	75
TB750/4	4	750	139	46	128	95
TB750/5	5	750	177	46	157	117
TB750/6	6	750	215	46	184	137
TB900/2	2	900	63	46	90	67
TB900/3	3	900	101	46	119	89
TB900/4	4	900	139	46	150	112
TB900/5	5	900	177	46	185	138
TB900/6	6	900	215	46	219	163
TB1000/2	2	1000	63	46	98	73
TB1000/3	3	1000	101	46	131	98
TB1000/4	4	1000	139	46	166	124
TB1000/5	5	1000	177	46	204	151
TB1000/6	6	1000	215	46	241	180
TB1500/2	2	1500	63	46	142	106
TB1500/3	3	1500	101	46	192	143
TB1500/4	4	1500	139	46	242	180
TB1500/5	5	1500	177	46	288	215
TB1500/6	6	1500	215	46	335	250
TB2000/2	2	2000	63	46	188	140
TB2000/3	3	2000	101	46	254	189
TB2000/4	4	2000	139	46	319	237
TB2000/5	5	2000	177	46	378	282
TB2000/6	6	2000	215	46	442	330
TB2500/2	2	2500	63	46	233	174
TB2500/3	3	2500	101	46	316	236
TB2500/4	4	2500	139	46	395	295
TB2500/5	5	2500	177	46	465	347
TB2500/6	6	2500	215	46	541	403

# Tubular Steel Radiators – Data Sheet

## Tubarad Accessories and Spares

				
<b>VN36</b> U-Bolt Floor Support	<b>VN37</b> Adjustable Pillar Floor Support	<b>VN38</b> Adjustable Pillar Floor Support	<b>VN28</b> Wall Bracket Set (3 Piece)	<b>VN30C, VN31M, VN33L</b> Wall Brackets
Height adjustable from 120mm to 200mm. Must be used with VN34 Retaining Stays.	Height adjustment up to 660mm.	Height adjustment up to 1060mm.	2 required for up to 10 sections. Thereafter (2 & 3 column) 1 for every additional 10 sections. (4,5 & 6 column) 1 for every additional 5 sections.	VN30C – For 2 & 3 column radiators. VN31M – For 4 column radiators. VN33L – For 5 & 6 column radiators.
				
<b>VN14</b> Air Vent	<b>VN02</b> Joining Nipple 1 ¼" BSP	<b>VN14</b> End Plug 1 ¼"	<b>VN15</b> Tapping Bush ⅛", ½", ¾", 1"	<b>VN03</b> Joining Key
				
<b>VN12</b> Silicon Tapping gasket	<b>VN13</b> Silicon Joining gasket	<b>VN34</b> Retaining Stay		
To fit 1 ¼" BSP.	To fit 1 ¼" BSP.	Minimum distance from wall = 200mm, Maximum distance from wall = 100mm. Minimum of 2 stays with wall brackets and floor support VN36.		

## Tubular Steel Radiators – Data Sheet

<b>Model</b>	<b>No. of Sections</b>	<b>Height (mm)</b>	<b>Width (mm)</b>	<b>Depth (mm)</b>	<b>Output 60°C Δt (Watts)</b>	<b>Output 50°C Δt (Watts)</b>
<b>Radline</b>						
TV50/08	8	500	288	30	256	192
TV50/10	10	500	360	30	320	240
TV50/12	12	500	432	30	384	288
TV50/14	14	500	504	30	448	336
TV50/16	16	500	240	30	512	384
TV90/08	8	900	288	30	456	344
TV90/10	10	900	360	30	570	430
TV90/12	12	900	432	30	684	516
TV90/14	14	900	504	30	798	602
TV90/16	16	900	240	30	912	688
TV150/08	8	1500	288	30	728	544
TV150/10	10	1500	360	30	910	680
TV150/12	12	1500	432	30	1092	816
TV150/14	14	1500	504	30	1274	952
TV150/16	16	1500	240	30	1456	1088
TV180/08	8	1800	288	30	872	656
TV180/10	10	1800	360	30	1090	820
TV180/12	12	1800	432	30	1308	984
TV180/14	14	1800	504	30	1526	1148
TV180/16	16	1800	240	30	1744	1312
TV200/08	8	2000	288	30	936	704
TV200/10	10	2000	360	30	1170	880
TV200/12	12	2000	432	30	1404	1056
TV200/14	14	2000	504	30	1638	1232
TV200/16	16	2000	240	30	1872	1408
<b>Décor</b>						
DEC32	-	450	736	139	1145	861
DEC32	-	450	828	139	1287	968
DEC32	-	450	920	139	1431	1076
DEC32	-	450	1196	139	1861	1399
DEC32	-	450	1380	139	2147	1614
DEC32	-	450	1564	139	2433	1829
DEC32	-	500	828	139	1415	1064
DEC32	-	550	828	139	1539	1157
DEC32	-	550	1012	139	1882	1415
DEC32	-	550	1196	139	2224	1672
DEC32	-	550	1380	139	2566	1929
DEC32	-	550	2024	139	3763	2929
DEC21	-	1800	460	85	1769	1330
DEC21	-	2000	460	85	1955	1470

# Tubular Steel Radiators – Data Sheet

## Tubular Steel Radiators:

- All tubular steel radiators are supplied in white as standard. Most RAL colours are available as an option.
- Wall fixing brackets are included in the price for all tubular steel radiators.
- The Tubarad model is available in heights from 220mm to 3000mm.
- Where required tapping bushes, plugs and air vents are supplied as standard and are free of charge.
- Radline radiators are available in heights from 300mm to 2300mm and widths from 4 to 35 sections.
- Radline models can be configured horizontally or vertically to suit your personal needs.
- A comprehensive range of brackets and floor supports is available to give total flexibility.
- These tubular steel radiators are designed for closed/indirect heating systems.
- All radiators are pressure tested to 13 bar with a maximum working pressure of 10 bar and are guaranteed against manufacturing defects for 5 years.
- Simply Radiators reserve the right to alter design, specifications and prices without prior notice.

simply radiators

Sandycroft House • 20 Station Road • Woburn Sands • Bucks MK17 8RW  
Tel: 0870 991 3648 • Fax: 0870 432 5213 • Email: [sales@simplyradiators.co.uk](mailto:sales@simplyradiators.co.uk) • Web: [www.simplyradiators.co.uk](http://www.simplyradiators.co.uk)