


modello	INV 70	INV 150	INV 180	INV 200
H mm	700	1500	1800	2000
l mm	670	1470	1770	1970
Watt/elem.	29 W($\Delta t=50^{\circ}\text{C}$)	60 W($\Delta t=50^{\circ}\text{C}$)	72 W($\Delta t=50^{\circ}\text{C}$)	78 W($\Delta t=50^{\circ}\text{C}$)
Watt/elem.Cromo	23 W($\Delta t=50^{\circ}\text{C}$)	48 W($\Delta t=50^{\circ}\text{C}$)	58 W($\Delta t=50^{\circ}\text{C}$)	62 W($\Delta t=50^{\circ}\text{C}$)

modello	INVD 70	INVD 150	INVD 180	INVD 200
H mm	700	1500	1800	2000
l mm	670	1470	1770	1970
Watt/elem.	41 W($\Delta t=50^{\circ}\text{C}$)	85 W($\Delta t=50^{\circ}\text{C}$)	102 W($\Delta t=50^{\circ}\text{C}$)	110 W($\Delta t=50^{\circ}\text{C}$)

Disponibile da 4 a 20 elementi
 $L = (\text{n. elementi} \times 36 \text{ mm}) - 7 \text{ mm}$

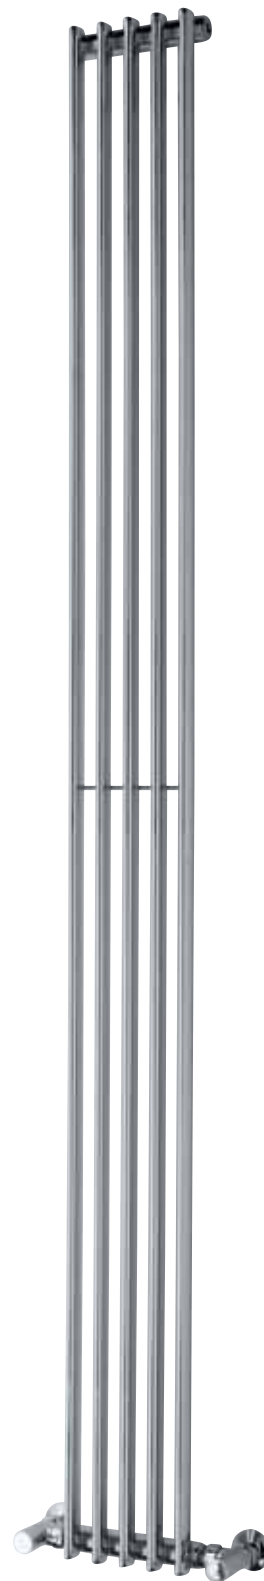

patented®



...la jeep disegnava sulle dune, mentre il vento ci scompigliava i capelli...